


Tablet Tester Four in One



V4T Series

VinSyst Tablet Tester Four in One, is our new innovate designed production with Four Functions to Test **Tablet's Hardness, Friability, Dissolution and Disintegration**.

1. In built Auto-Control, Auto-Test, Auto-Diagnose and Auto-Alarm.
2. The Circular Water Current pumped by Magnetism Pump Heats the System equally. Pump and the Bath Liquid also achieves an even Temp.
3. Accurately Auto-Controlled temp. along with Auto Stop at Timing Point.
4. Alternate display of Preset and Real Data.
5. It has Three Vessels and Three Poles arranged on One Line. The Head Part of the Instrument can be Artificially turned over Smoothly and Flexibly.
6. The Basket Units and Paddle Units are made of Imported Stainless Steel.
7. Highly Accurate in Testing Rotary Speed and Counting Friability.
8. The Hardness has High Accuracy Press Sensor and the Hardness Data is Displayed in Newton.
9. It tests Tablet Hardness Continuously. The Tablet is Loaded and Pressed Artificially. There is Auto-Display, Auto-Memorize, Auto-Reset, Auto-Retest.

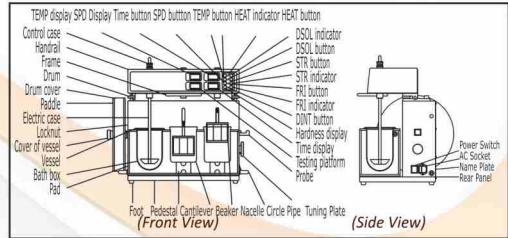

Specifications :

Model	V4T 4 in 1
Temperature Range	20~40°C ± 0.3°C
Speed Range	20~200 rpm ± 2 rpm
Automatic Time Range	1~900 min ± 0.5 min
Stations of Dissolution	3
Paddle Radial Run-Out	± 0.5 mm
Basket Radial Run-Out	± 1.0 mm
Basket Assemblies	2
Nacelle Up & Down Frequency	30~32/min
Drum	1
Drums Size Radius	∅ 286 mm, Depth: 39 mm
Height	156 mm
Speed of Drum	25±1r/min
Cyclomatic Number of Drum	100±1
Hardness Range	2~199.9 N±1N
Diameter Range	3~20 mm
Power	220V/50Hz/600W
Dimensions (mm)	580 x 380 x 470
Weight	32 kg

Tablet Tester Two in One



V2T Series

VinSyst Tablet Tester Two in One, is a combination of **Tablet Friability & Tablet Hardness Tester**. The Tester Detects Hardness as well as Friability of the Tablet. It has a Large LCD Display and is easy to Operate.

Specifications :

Model	V2T 2 in 1
Diameter of Brake Drum	∅286 mm
Depth of Brake Drum	39 mm
Rotary Speed	25r/min. 100r/min.
Power	200V 50Hz
Environment Temperature	0~350C
Relative Humidity	< 85%
Range of Hardness Testing	0~200 N
Accuracy	±5 N
Resolution	0.01 N
Max. Diameter of Tablet	30 mm
Dimensions (mm)	280 x 260 x 250
Weight	16 kg